

# SUNSCREEN 1%

Tight-weave solar screen — maximum solar control with preserved exterior view.  
Openness 1%, selected to the orientation and application.

**1%**

OPENNESS

**4 variants**


IN THIS LINE

**On req.**

WARRANTY

**On req.**

COLOUR RANGE

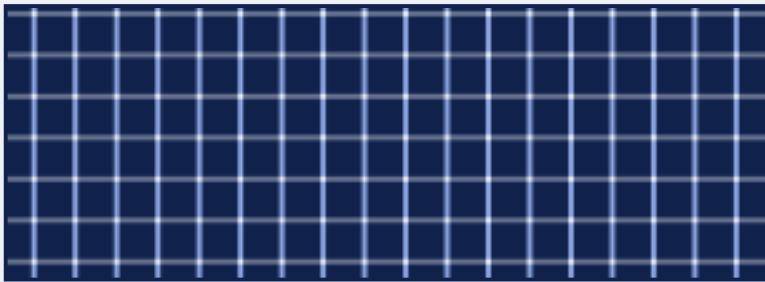

SCHEMATIC · FABRIC APERTURE · NOT TO SCALE

OPENNESS — 1%

**1** %

OPENNESS  
FACTOR

## SPECIFICATION

Openness factor	<b>1%</b>
Composition	<b>30% PVC / 70% polyester</b>
Reaction to fire	<b>DIN 4102 B1 · NFPA 701</b>
Width	<b>On request</b>
Weight / thickness	<b>On request</b>
Use	<b>Solar screen with exterior view</b>
Colour range	<b>On request</b>
Warranty	<b>On request</b>

## CERTIFICATIONS

Third-party certifications: none declared

## THE LINE

The 1% SUNSCREEN — densest weave in the line.  
Maximum solar control while preserving an exterior view.  
Colour range on request.

## COLOUR & PERFORMANCE

The colour range and any per-colour performance figures are provided on request. SUNX shows only verified colour data — no placeholder swatches.